
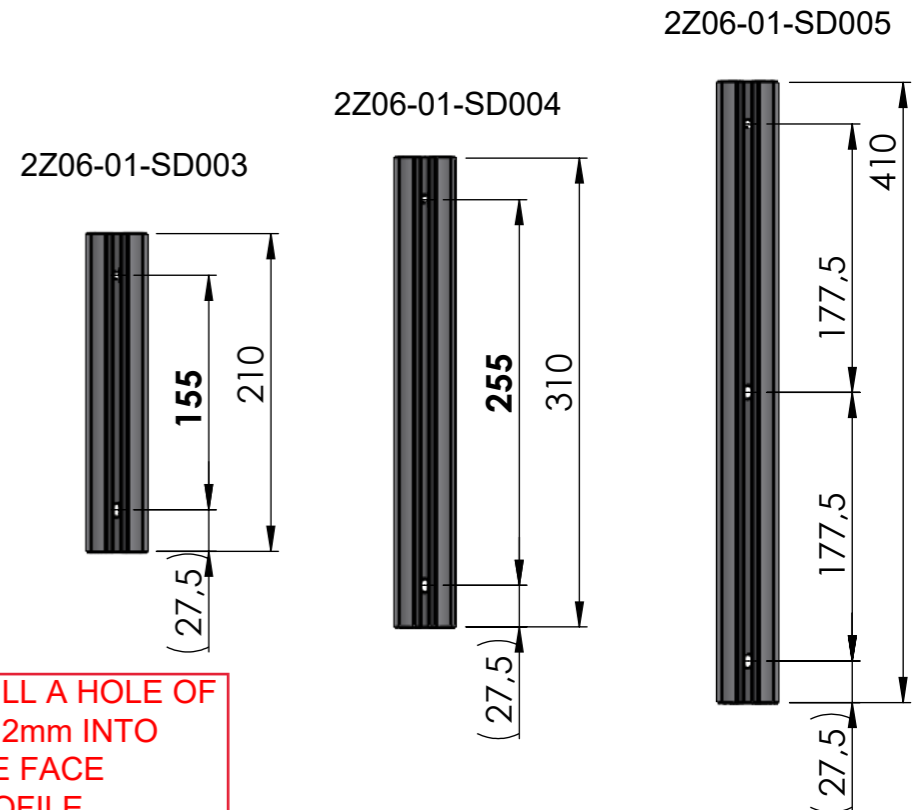
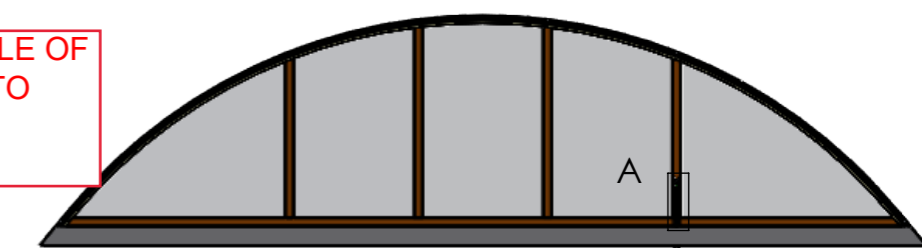
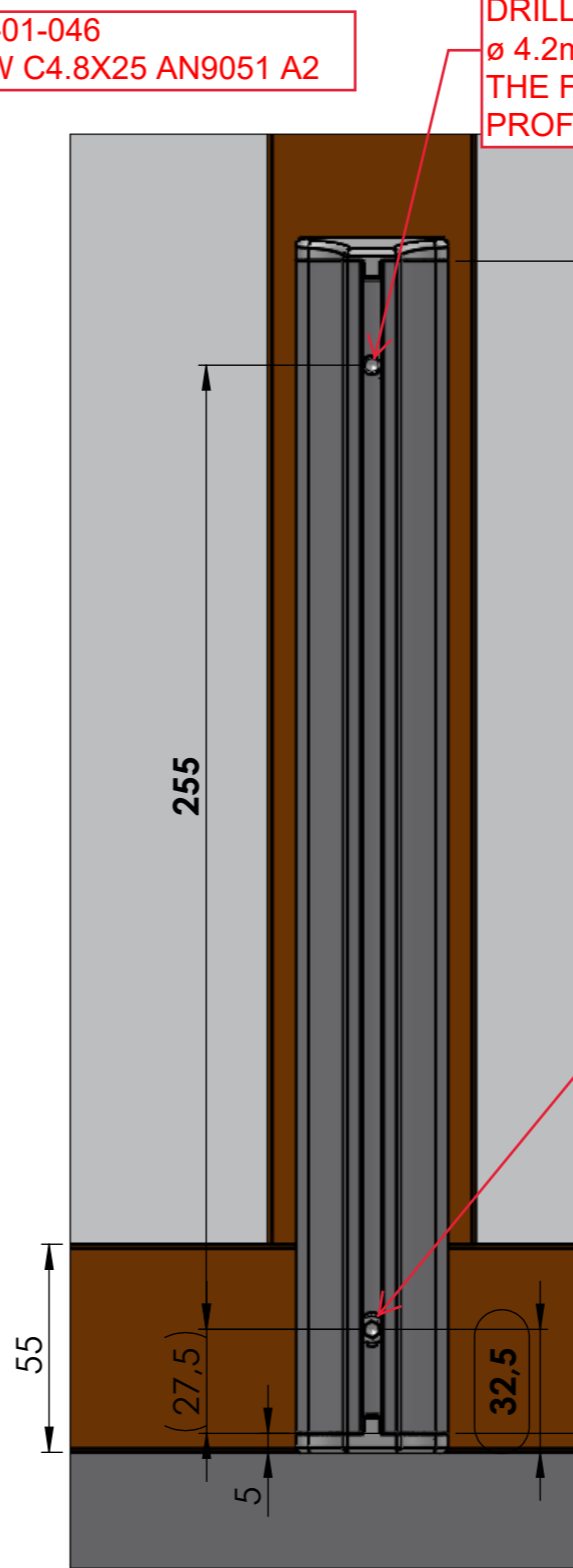


FACE WITHOUT DOOR

TO BE PLACED FROM THE OUTSIDE OF THE FACE

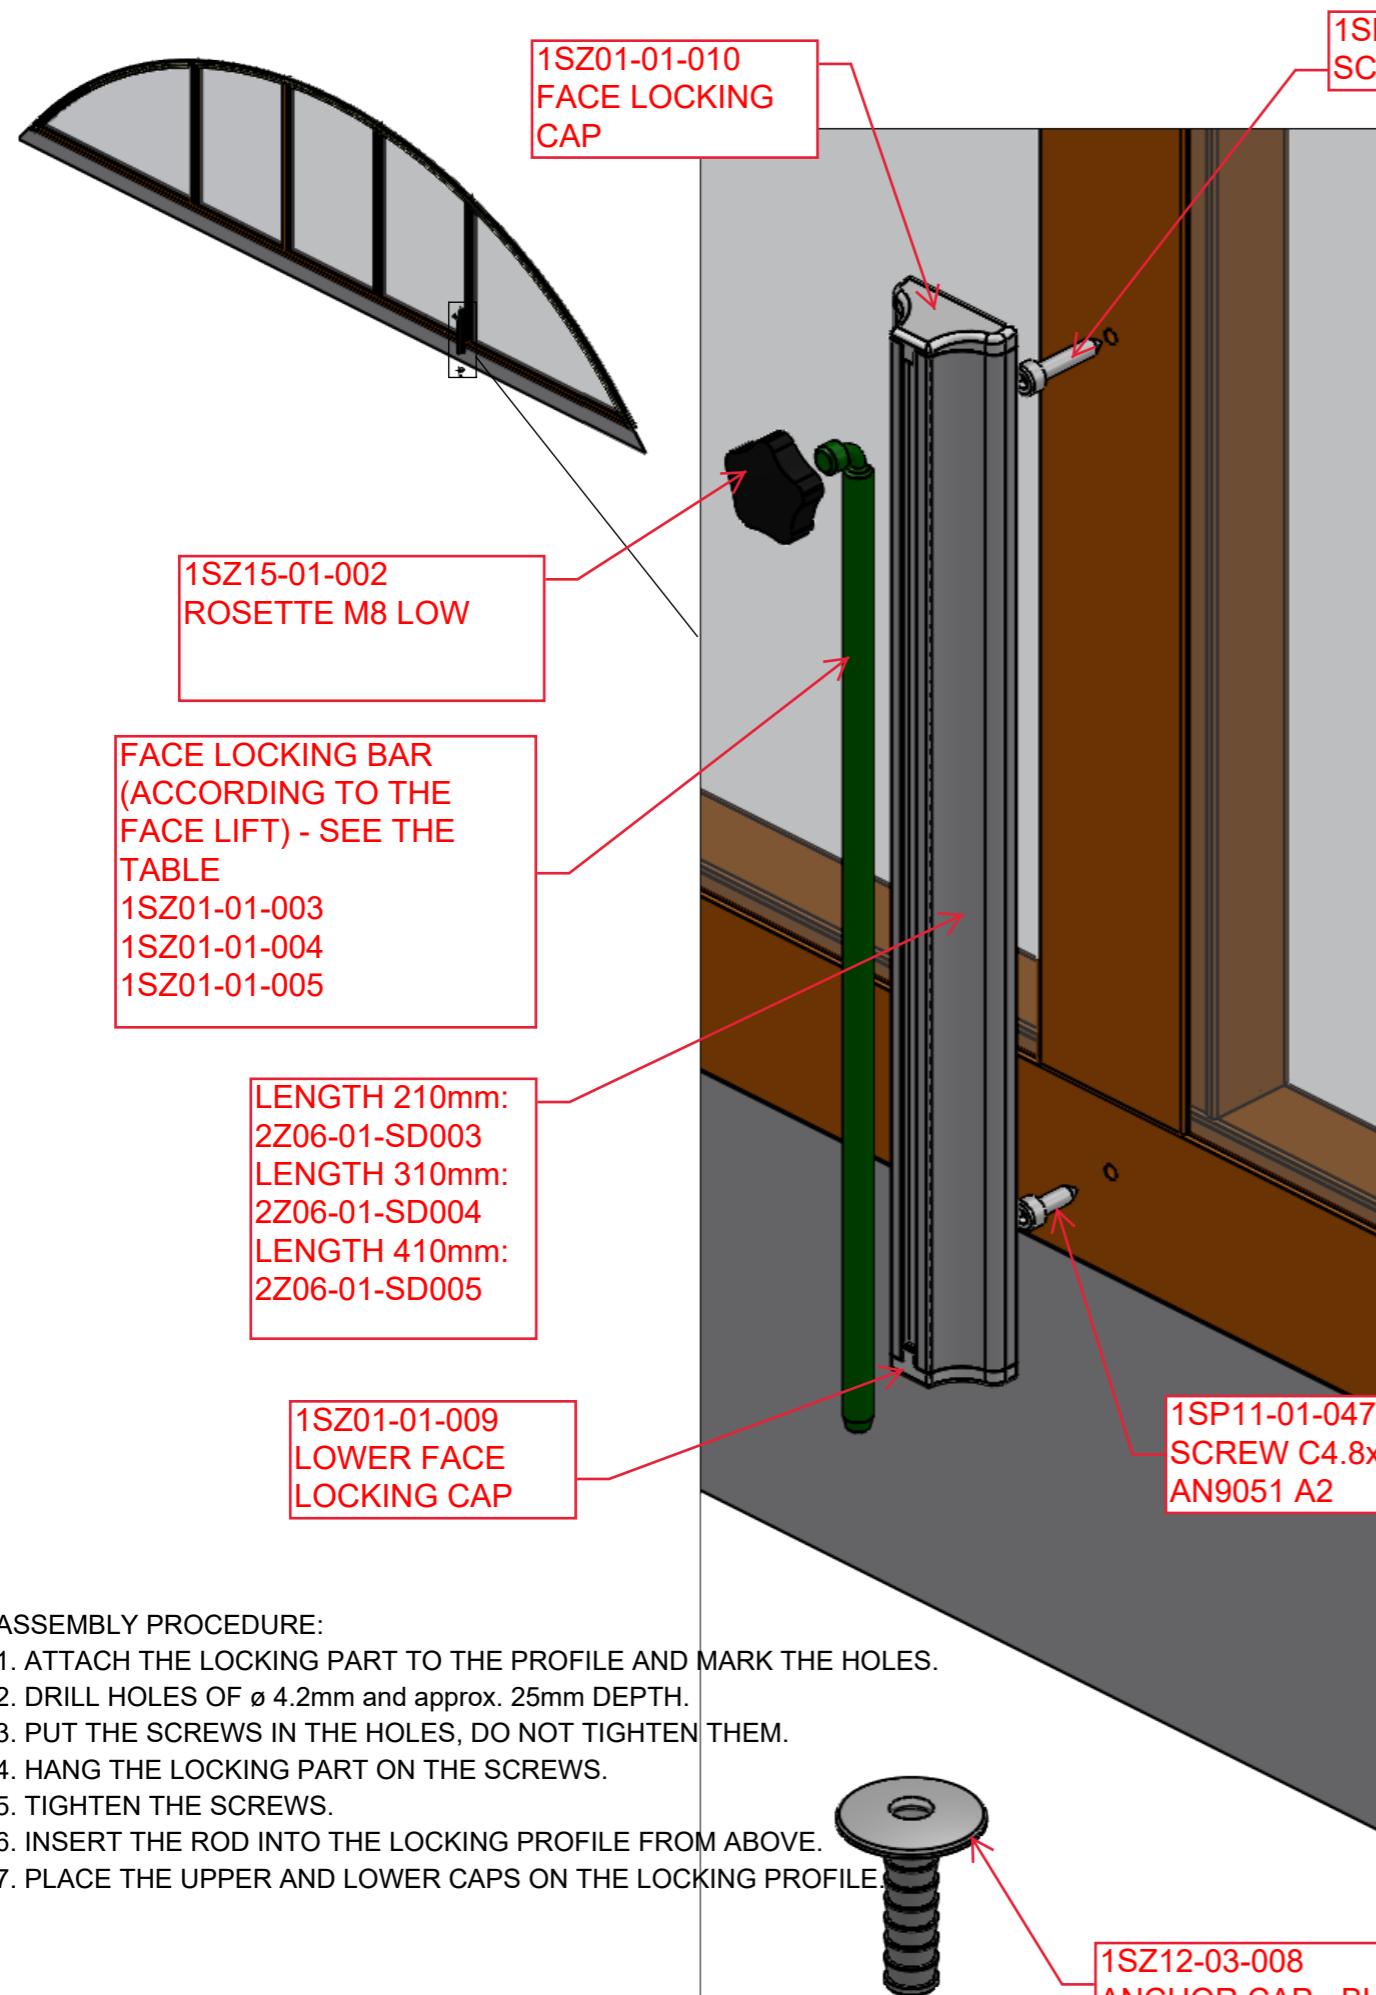

NOTE:  
 1. THE LOCATION OF THE FACE LOCKING MECHANISM IS OPTIONAL, ACCORDING TO THE SITUATION.  
 2. THE STANDARD LOCATION IS AS CLOSE AS POSSIBLE TO THE CENTRE (AXIS) OF THE ENCLOSURE (PLACE IT ON THE CENTRAL FACE STAND OR ON ONE OF THE TWO FACE STANDS NEAREST TO THE CENTRE).

- ASSEMBLY PROCEDURE:
1. ATTACH THE LOCKING PART TO THE PROFILE AND MARK THE HOLES.
  2. DRILL HOLES OF ø 4.2mm and approx. 25mm DEPTH.
  3. PUT THE SCREWS IN THE HOLES, DO NOT TIGHTEN THEM.
  4. HANG THE LOCKING PART ON THE SCREWS.
  5. TIGHTEN THE SCREWS.
  6. INSERT THE ROD INTO THE LOCKING PROFILE FROM ABOVE.
  7. PLACE THE UPPER AND LOWER CAPS ON THE LOCKING PROFILE.

AL09-017	PROFILE LENGTH	FACE LOCKING BAR	FACE LIFT
2Z06-01-SD003	210 mm	97.10.0881.2	1 - 8 cm
2Z06-01-SD004	310 mm	97.10.0882.2	8,5 - 18 cm
2Z06-01-SD005	410 mm	97.10.1882.2	18,5 - 28 cm

FACE LOCKING (FACE WITHOUT DOOR)  
 (APPLIES TO FACES WITHOUT DOORS)  
 ENCLOSURE TYPES M,L,L +,XL